


P.i.T.O.E.N.i.X

MAX.CAPACITY. 60ML-3L | OUTPUT 2000-6950 BPH. | CAVITY. 2-6

SERIES

**PET STRETCH
BLOW MOLDING
MACHINE**

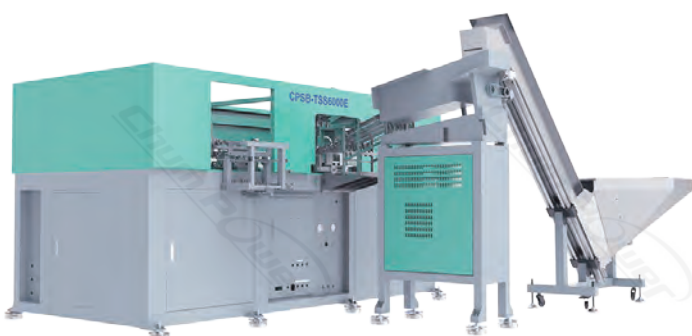

SPECIFICATION 規格表

工程規格表	模穴數	瓶子最大容量	最大牙部尺寸	最大瓶身直徑	最大瓶身高度	※ 理論產能	額定電量	機台尺寸	機台重量
Specification	Number of cavities (cavities)	Max. capacity (ltr)	Max. neck diameter (mm)	Max. diameter (mm)	Max. height (mm)	Theoretical Output	Total installed power (kw)	Size (L x W x H) (mm)	Weight (kg)
CPSB-TS2000	2	1.5	38	105	320	2200	47	2400x2150x2500	2700
CPSB-TS2000E	2	1.5	38	105	320	2600	53	2400x2150x2500	2700
CPSB-TS2000W	2	1.5	63	105	320	2000	47	2400x2150x2500	2700
CPSB-TS2000EW	2	1.5	63	105	320	2400	53	2400x2150x2500	2700
CPSB-T3000	3	3	38	140	350	3000	100	4000x2150x2500	6500
CPSB-T3000E	3	3	38	140	350	3400	109	4000x2150x2500	6500
CPSB-TSS3000	3	0.6	38	68	240	3450	39	2400x2150x2500	2700
CPSB-TSS3000E	3	0.6	38	68	240	4000	45	2400x2150x2500	2700
CPSB-TS4000	4	1.5	38	105	320	4100	88	4000x2150x2500	6500
CPSB-TS4000E	4	1.5	38	105	320	4600	97	4000x2150x2500	6500
CPSB-TS4000W	4	1.5	63	105	320	3650	88	4000x2150x2500	6500
CPSB-TS4000EW	4	1.5	63	105	320	4200	97	4000x2150x2500	6500
CPSB-TSS6000	6 (3)	0.6 (1.5)	38	68 (105)	240 (320)	6150	72	4000x2150x2500	6500
CPSB-TSS6000E	6 (3)	0.6 (1.5)	38	68 (105)	240 (320)	6950	81	4000x2150x2500	6500
CPSB-TS2000H	2	1	38	85	320	1000	41	2400x2150x2500	2700
CPSB-TS4000H	4	1	38	85	320	2000	88	4000x2150x2500	6500
CPSB-TSS6000H	6	0.6	38	68	240	3000	72	4000x2150x2500	6500

- If mold thickness is less than 7mm, it is required to be made in stainless steel.
- The actual output depends on the preform quality and bottle shape.
- Specification are subject to change without notice.

- 模具壁厚不得小於 7mm，若小於 7mm 必須使用不銹鋼材質模具。
- 最終產能須依據瓶胚、瓶型而定。
- 規格有變更時，恕不另行通知。

Cost-Effective and Poductive Solution

經濟高效
生產解決方案



CHUMPOWER Phoenix Series offers high stability at a reasonable price, with a compact footprint, easy operation, and low maintenance—ideal for various production settings. Its universal heating system supports a wide range of products including mineral water, soda, sauces, tea, juice, distilled water, alcohol, cooking oil, cleaning agents, and cosmetics.

CPSB-TS 雙軸延伸拉吹機

產能：2000 – 6950 BPH.

模穴數：2-6

瓶子最大容量：60ml-3L

銓寶鳳凰系列具備合理價格與高穩定性，且佔地面積小，操作簡單、維修容易，適合各種生產場域。泛用型加熱設計，廣泛適用於礦泉水、碳酸飲料、調味料、茶、果汁、蒸餾水、酒精飲料、食用油、清潔液、化妝品等多樣產品，滿足多元市場需求。

PHOENIX SERIES

鳳凰系列




To improve safety and durability, the sensor system has been upgraded for better detection accuracy and stability. An added mold-closing sensor ensures correct toggle positioning and boosts overall safety.

It supports small-volume, multi-variety production and can be configured as a full-electric platform for smart manufacturing needs.

為強化機台的安全性與耐用性，採用升級式 SENSOR 感測機構，提升檢測準確性與系統穩定性，並新增關模檢測功能，確保連桿位置正常，進一步提高整體安全等級。

同時支援「少量多樣」的彈性生產模式，並可選配為全電式機台，滿足智慧化製程升級需求。

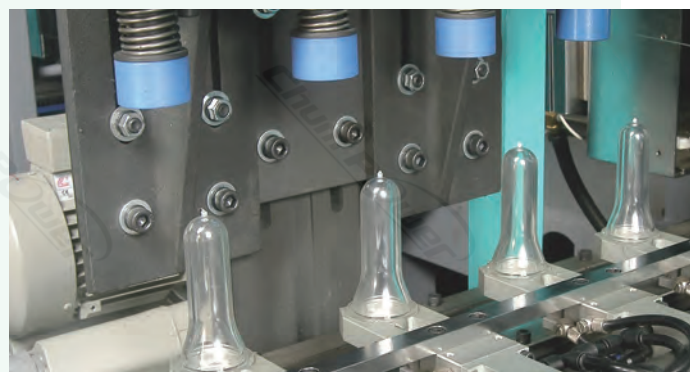

FULLY ELECTRIC

SERVO-ELECTRIC TECHNOLOGY

鳳凰全電式機台



FEATURES

- Fast and smooth servo-driven transferring system
- Low vibration and quiet servo-driven clamping system
- Servo-driven stretch rod assembly for convenient adjustment
- Featuring heating output compensation system
- Air recovery system to reuse the waste air

機台特性

- 移位伺服，快速穩定
- 成型伺服，低震動、低噪音
- 拉吹伺服，調整方便
- 高壓吹氣，回收再利用



High Precision



High Reliability



Energy Saving



Your BEST Partner

www.chumpower.com

CHUMPOWER MACHINERY CORP.

TEL: 886-4-2338-8289 FAX: 886-4-2338-0219

No. 688-1, Sec. 3, Zhongshan Rd., Wuri Dist, Taichung City 414, Taiwan

contact@chumpower.com



v202505